



Swivel Joint Type HCR

Design / Dimensions:

- Flanged connection
- Entirely PTFE
- Doubled safety sealing
- Radial gasket
- DN25 to DN250
- (others on request)
- PN10
- Tmax 250°C

Material:

- Standard: 26CrMo4, 1.4571
- Stainless steel, carbon steel, low temperature steel
- Gasket material: PTFE

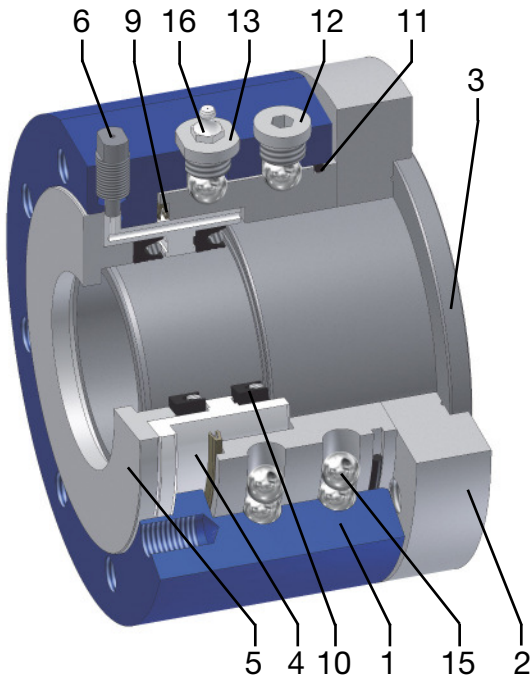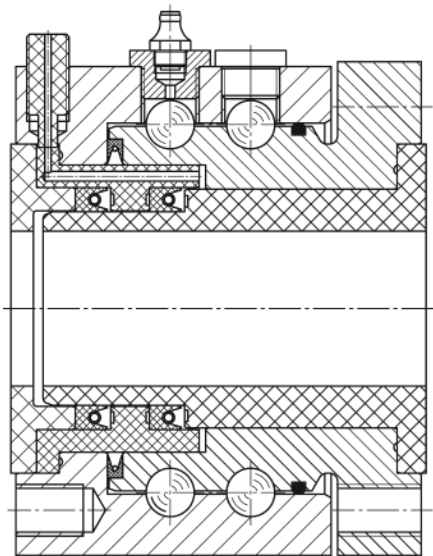

Item	Description
1	Outer Part
2	Inner Part
3	Bush I
4	Bush II
5	Bush III
6	Leckageplug
9	Secondary Seal
10	Gasket
11	Dust Seal
12	Plug
13	Plug
15	Ball
16	Grease Nipple

Our Swivel Joint for high corrosive Fluids

HCR Swivel Joints are suitable for the use with high corrosive fluids. Nominal diameters from DN25 to DN200 are available.